



RIBFIT[™]

RAIL-LESS RACKING FOR R-PANEL AND TRAPEZOIDAL METAL ROOFS

INSTALLATION GUIDE

REVISION DATE: 03/15/24

VERSION: v3.5



Clicking the page name will take you to that page

TABLE OF CONTENTS **PAGE 01**

FEATURES & BENEFITS **PAGE 02**

INSTALLER INFO **PAGE 03**

COMPONENTS **PAGE 04**

RATINGS **PAGE 05**

INSTALLATION **PAGE 06**

GROUNDING **PAGE 10**

COMPATIBLE MODULES **PAGE 15**



RIBFIT

RibFit is a rail-less mounting system that conforms to UL 2703 and is designed for use on metal roofs. The RibFit system consists of an aluminum slide that is directly attached to the ridge. Minimal components and integrated bonding pins reduce installation times compared to rail-based systems. RibFit is compatible with most R-panel and trapezoidal metal roof panels with a ridge width of $\frac{3}{4}$ " or greater and 26-gauge or thicker.

FEATURES

- Four component system
- Three levels of water protection
- Compatible with all of EcoFasten's bonding accessories
- Utilizes self piercing screws for a quick installation
- Click-on mid and end clamps



DISCLAIMER

This manual describes proper installation procedures and provides necessary standards required for product reliability. Warranty details are available on the website. All installers must thoroughly read this manual and have a clear understanding of the installation procedures prior to installation. Failure to follow these guidelines may result in property damage, bodily injury or even death.

IT IS THE INSTALLER'S RESPONSIBILITY TO:

- Ensure safe installation of all electrical aspects of the array. All electrical installation and procedures should be conducted by a licensed and bonded electrician or solar contractor. All work must comply with national, state and local installation procedures, product and safety standards.
- Comply with all applicable local or national building and fire codes, including any that may supersede this manual.
- Ensure all products are appropriate for the installation, environment, and array under the site's loading conditions.
- Use only EcoFasten parts or parts recommended by EcoFasten; substituting parts may void any applicable warranty.
- Review the Design Assistant and Certification Letters to confirm design specifications.
- Ensure provided information is accurate. Issues resulting from inaccurate information are the installer's responsibility.
- Ensure bare copper grounding wire does not contact aluminum and zinc-plated steel components, to prevent risk of galvanic corrosion.
- If loose components or loose fasteners are found during periodic inspection, re-tighten immediately. Any components showing signs of corrosion or damage that compromise safety shall be replaced immediately.
- Provide an appropriate method of direct-to-earth grounding according to the latest edition of the National Electrical
- Code, including NEC 250: Grounding and Bonding, and NEC 690: Solar Photovoltaic Systems.
- Disconnect AC power before servicing or removing modules, AC modules, microinverters and power optimizers.
- Review module and any 3rd party manufacturer's documentation for compatibility and compliance with warranty terms and conditions.
- Ensure that the roof is in good condition prior to installing any EcoFasten components.



CLAMP PART NUMBERS

END CLAMPS

*Frame Thickness**Article Number*

30 mm - 40mm

2099039

MID CLAMPS

*Frame Thickness**Article Number*

30-40 mm

2099022

SYSTEM COMPONENTS REQUIRED



**RIBFIT
STEEL SLIDE**



END CLAMP




MID CLAMP



**SELF-PIERCING
SCREW**

SYSTEM COMPONENTS ACCESSORIES



**FRAME MLPE
MOUNT**



MODULE JUMPER


RATINGS

Fire Rating*	Class A System Fire Rating
Max System Voltage	1500 VDC
Max Fuse Rating	40A
Certification	Conforms to UL STD 2703
Warranty	25 Year Material and Workmanship
UL 2703 Markings	Product listing label is located on the RibFit Slide
Roof Pitch	1/4:12 - 12:12
UL 2703 Allowable Design Load Rating	10 psf downward, 5 psf upward, and 5 psf lateral
Max Module Size	25.6 sqft
Module Orientation	Landscape
Multiple Use Rated Components (Position Independent)	End Clamp, Mid Clamp, MLPE Clip, and MLPE Mount
UL 441 Water Seal Rating**	RibFit Slide

*Class A System Fire Rating with Steep and Low Slope Roofs with Types 1, 2, 3, 29 and 38 PV modules when installed over non-combustible metal roof.

** Applicable for 26 gauge thick metal roof panels or thicker

UL 2703 MARKING EXAMPLE:

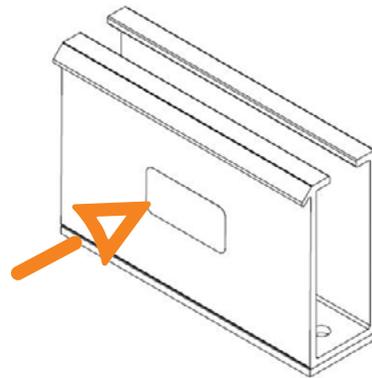


TORQUE SPECIFICATIONS

Component	Torque (in-lb)	Notes
Self Piercing Screw	N/A	Fully Seat. Use visual indicator of the black EPDM ring around the bonded washer for torquing.
Mid-Clamp	144	
End-Clamp	144	
MLPE Mount	144	
Ground Lug	N/A	Refer to specific ground lug manufacturer's installation manual
Frame MLPE Mount	144	

Periodic re-inspection of components shall be performed to verify that there is no corrosion detrimental to system strength and electrical conductivity, no loose bolts, and/or other variables that could compromise array safety. Any corroded or damaged components shall be immediately replaced

RIBFIT INSTALLATION

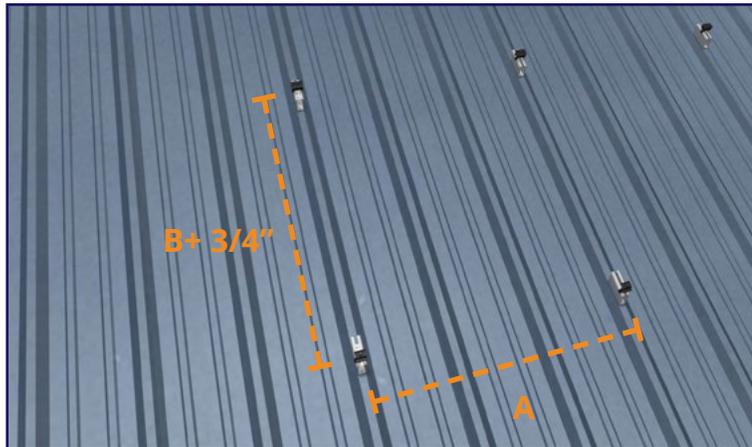

ARRAY LAYOUT

1. The N-S distance between RibFit Slides should be equal to the length of the short side of the module (B) plus 3/4" (B+3/4 ") after each row.
2. Horizontal RibFit Slide spacing (A) should allow the clamps to fit within the allowable clamping range specified by the module manufacturer.

ROOF MARKING

1. Mark the perimeter and corners of the array on the surface.
2. Draw or snap chalk lines where the RibFit Slides will be installed. Refer to the module manufacturer specifications to determine allowable mounting locations.

RIBFIT SLIDE POSITIONING

Mark the center of the corrugation and draw a straight line to indicate where the RibFit Slide must be installed. Double check the ridge width (minimum of 3/4") and metal thickness (minimum of 26ga).



RIBFIT SLIDE INSTALLATION




ATTACHING THE SLIDE

1. Screw the RibFit Slides onto the roof using the self piercing screws. Use a cordless drill with a 1/4" hex socket.
2. Refer to the RibFit Structural Document Packet on the website to determine the correct number of screws needed for the installation. s




SCREW POSITIONING

3. Confirm the self-piercing screw is applied perpendicular to the roof surface.
4. A water tight seal has been formed when the rubber on the washer creates a visible ring around the screw head.

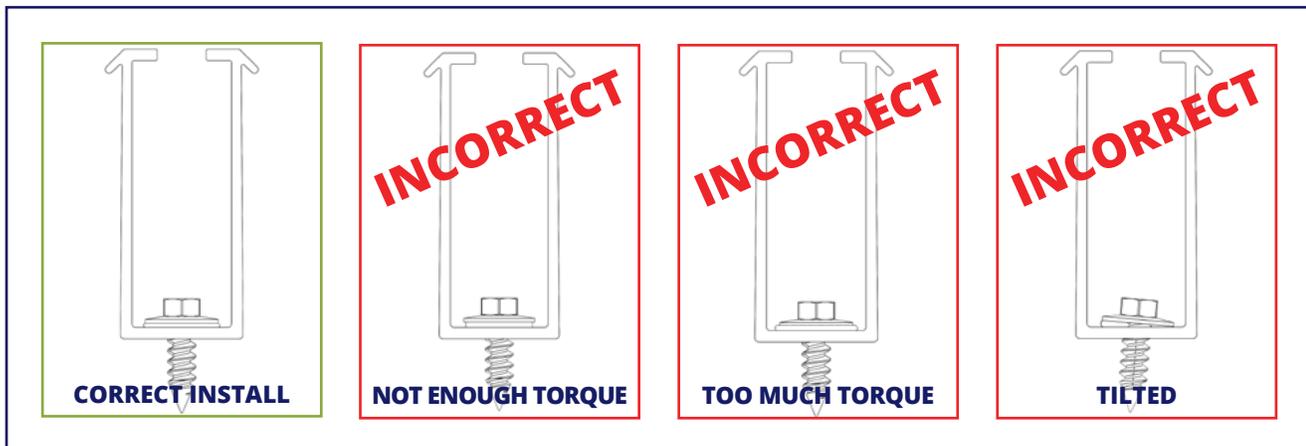


INSTALLATION

SYSTEM INSTALLATION

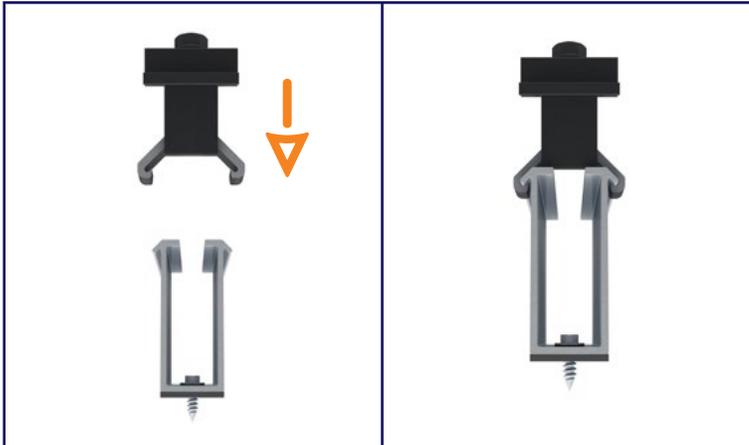

INSTALL THE END-CLAMPS

1. Place an end-clamp on the first two RibFit Slides of the row closest to the eave of the roof.
2. Lower the end clamp to the RibFit Slide and “click” clamp over the flanges on each side.

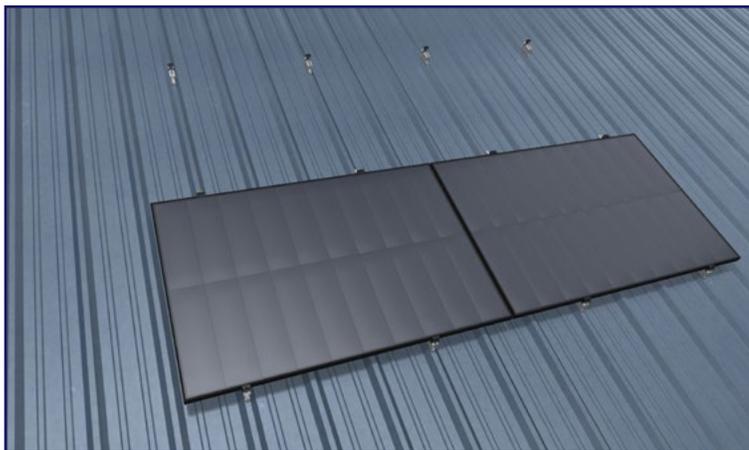

PLACE THE FIRST MODULE

1. Place the first module onto the RibFit Slides. Align the module and slide the end-clamps flush against the module frame.
2. Tighten end-clamps to 96 in-lbs.




INSTALL MID-CLAMPS

1. Click the mid-clamps in place on the next RibFit Slides in the column and slide them flush with the first module.
2. Place the second module in the column making sure the module frame is flush with the clamps.
3. Tighten mid-clamps to 144 in-lbs.
4. Repeat until first column is fully installed.




SYSTEM INSTALLATION

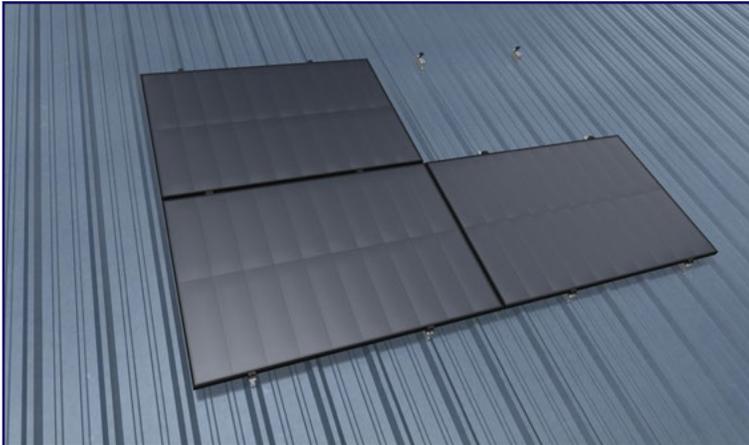

INSTALL ADDITIONAL COLUMNS OF MODULES

1. Install remaining modules in first column of the array by repeating the steps on pages 06 and 07. When installing the final module in a column, affix the final module with two end clamps. Tighten the clamps to 96 in-lbs.
2. Repeat these steps for each column of modules using the mid-clamp clicker as a spacer for a consistent E-W gap between the module.
3. A 2" thermal expansion gap is required for each continuous 40' length of modules in a column.


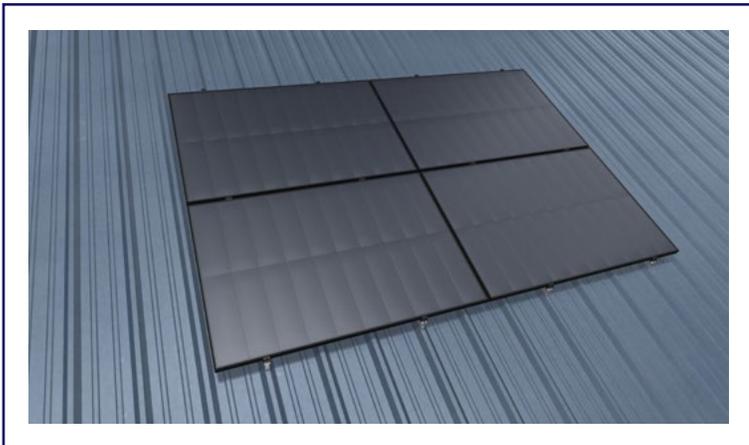


BONDING & GROUNDING



BONDING COMPONENTS




1. Bonding paths are carried module to module through the mid-clamp via the integrated bonding pins.
2. Columns can be bonded by creating a module to module connection using the Dynobond module bonding jumper.
3. Bonding paths are denoted by the green arrow.

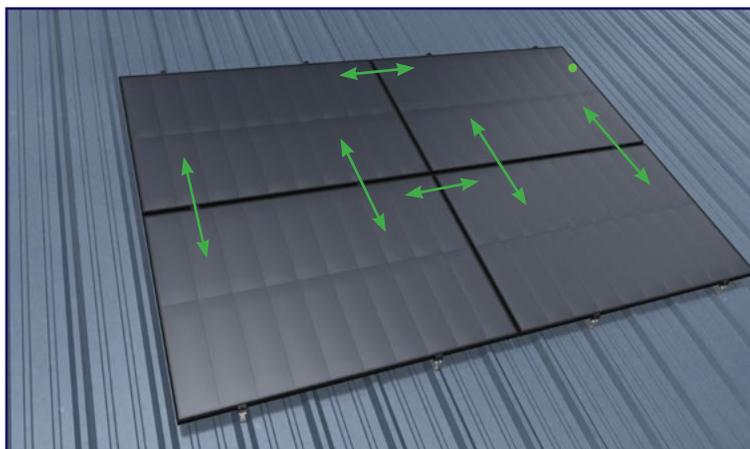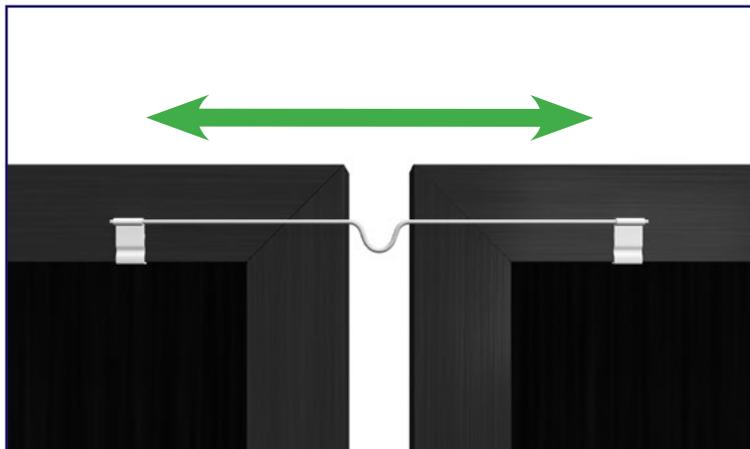

GROUNDING PATHS

1. Bonding paths travel through the array as shown here.
2. Two mid clamps bond a pair of modules.
3. One module bonding jumper bonds column to column.
4. One grounding lug per continuous array (shown as the green circle at the array corner).

GROUNDING LUG INSTALLATION

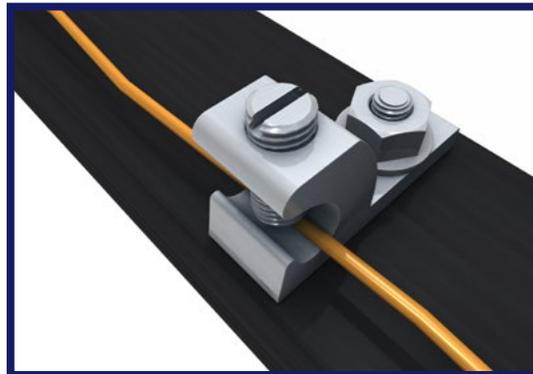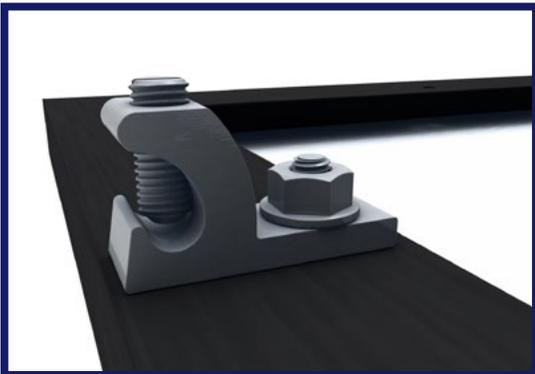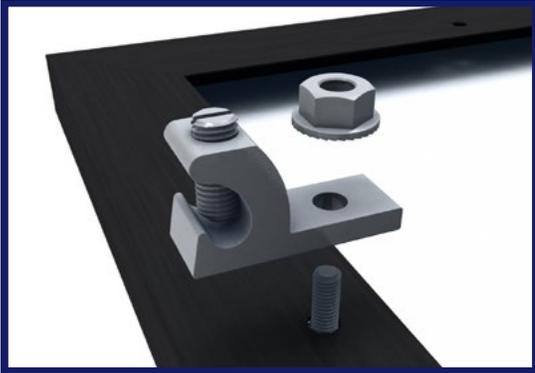

Install ground lug on the module per ground lug and module manufacturer's instructions

NECESSARY COMPONENTS:

*One of the following ground lugs
(or any UL 2703 compliant ground lug):*

- Burndy CL50-1TN Ground Lug (UL 2703 - E3514343 / UL 467-E9999)
- ILSCO SGB-4 Ground Lug (UL 2703 - E354420 / UL 467 - E34440)
- ILSCO GBL-4DBT (UL2703 - E354420 / UL467 - E34440)
- ILSCO GBL-4DBTH (UL 2703 - E354420 / UL 467 - E34440)
- ILSCO GBL-4SS (UL 2703 - E354420 / UL 467 - E34440)



This system needs to be grounded in accordance with the National Electrical Code, ANSI/NFPA 70.

Copper wire should not come in direct contact with aluminum at any point on the array

FRAME MLPE MOUNT



INSTALLING THE FRAME MLPE MOUNT ACCESSORY:


- Slide the Frame MLPE Mount into the slot of the micro-inverter/power optimizer.
- Slide the micro-inverter/optimizer flange underneath the inside of the module frame with the frame MLPE mount on the outside of the frame.
- Tighten the bolt to 144 in-lb to clamp the Frame MLPE Mount to the module frame and the micro-inverter/power optimizer to the Frame MLPE Mount.
- Ensure that the lip on the clip is tight against the frame and that the micro-inverter/power optimizer flange is tight against the clip flange to avoid rotation during tightening.

FRAME MLPE MOUNT AND MLPE MOUNT IS COMPATIBLE WITH:

- **ENPHASE:** M250-72, 250-60, M215-60, C250-72, S230, S280, IQ 6, IQ 6+, IQ7, IQ 7A, IQ 7+, IQ7 PD, IQ 7X, Q Aggregator; IQ8-60, IQ8PLUS-72, IQ8A-72, IQ8H-208-72, IQ8H-240-72, IQ8M-72, may be followed by -2-US
- **HOYMILES:** HMA-xxxYY-ZZ where "A" can be blank or S, xxx can be 300, 350, 400, 450, 500, 600, 700, 800, 900, 1000, 1200, 1500, 1600, 1800 or 2000; "YY" can be NT, 1T, 2T, 4T; and "ZZ" can be blank, NA or 208-NA
- **NEP:** BDM-300, BDM-300X2, BDM-550, BDM-650 and BDM-800
- **SOLAREGE:** M1600, P300, P320, P340, P370, P400, P401, P405, P485, P505, P600, P700, P730, P750, P800p, P800s, P801, P850, P860, P950, P960, P1100, P1101, S440, S500, S500B, S650B, S1200, S1201
- **TIGO:** Tigo Access Point (TAP), TS4-R-X (where X can be F, M, O, or S), TS4-R-X-DUO (where X can be M, O, or S), TS4-A-X (where X can be F, 2F, O, O-DUO, or S)
 - All Tigos must be installed with the Tigo provided clips only

MODULE MAINTENANCE AND SERVICING

During servicing or maintenance, module removal may disrupt the bonding path and could introduce the risk of electric shock. If module removal is required for servicing, then a Module Jumper shall be installed to the adjacent modules to maintain the bond path. Modules should only be removed by qualified persons in compliance with the instructions in this manual.

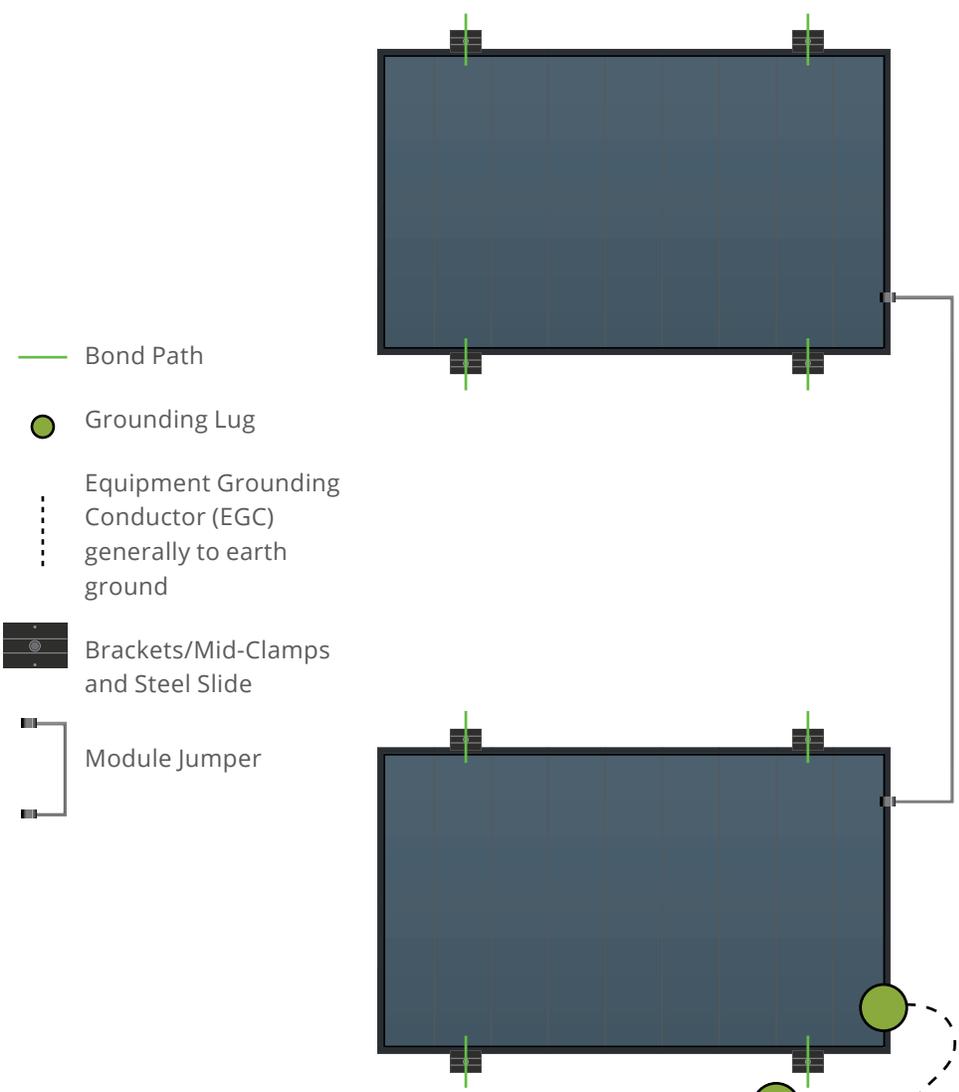

Ilco SGB-4 Approved for Mounting to Steel Slide as alternate grounding location

GROUNDING

COMPATIBLE MODULES

The RibFit System has been tested and evaluated to UL 2703 for bonding, grounding, mechanical loading and fire classification, and may be used to ground and/or mount PV modules listed to UL 1703 or UL 61730. A list of approved modules is included below.

Unless otherwise noted, “xxx” refers to the module power rating and both black and silver frames are included in the certification. ” ”

MANUFACTURER	LIST OF UL 2703 APPROVED MODULES
Adani	Adani modules with 30, 35 and 40 mm frames ASX-Y-ZZ-xxx Where “X” can be B, M or P, “Y” can be 6 or 7, and “ZZ” can be blank, PERC, B-PERC, or AB-PERC
AIONRISE	Aionrise modules with 35 and 40 mm frames AIONyyG1-xxx Where “yy” can be 60 or 72
Amerisolar	Amerisolar modules with 35, 40 and 50 mm frames AS-bYxxxZ Where “b” can be 5 or 6; “Y” can be M, P, M27, P27, M30, or P30; and “Z” can be blank, W or WB
Aptos Solar	Aptos modules with 35 and 40 mm frames DNA-yy-zzaa-xxx Where “yy” can be 108, 120 or 144; “zz” can be MF or BF; and “aa” can be 10, 23 or 26
Astronergy Solar	Astronergy modules with 30, 35, 40, and 45 mm frames aaSMbbyyC/zz-xxx Where “aa” can be CH or A; “bb” can be 60, 66, or 72; “yy” can be blank, 10 or 12; “C” can be M, P, M(BL), M-HC, M(BL)-HC, P-HC, M(DG), or M(DGT); and “zz” can be blank, HV, F-B, or F-BH
ASUN	ASUN modules with 35 and 40 mm frames ASUN-xxx-YYZZ-aa Where “YY” can be 60 or 72; “ZZ” can be M, or MH5; and “aa” can be blank or BB
Auxin	Auxin modules with 35 and 40 mm frames AXNCyzAxxxB Where “C” can be 6, 10 or G1; “y” can be M or P; “z” can be blank, 08, 09, 610, 11, or 612; and “A” can be blank, F, M or T; and “B” can be blank, A, B, C or W

MANUFACTURER	LIST OF UL 2703 APPROVED MODULES
Axitec	Axitec Modules with 30, 35 and 40 mm frames AC-xxxY/aaZZb Where "Y" can be M, P, MH or MBT; "aa" can be blank, 125- or 156-; "ZZ" can be 54, 60, 72, 108, 120, or 144; "b" can be S, X, V, VB, XV, or MX
Bluesun Solar	Bluesun modules with 30 and 35 mm frames BSMxxxM-AAA Where "AAA" can be 60HPH or 72HBD
Boviet	Boviet modules with 35 and 40 mm frames BVM66aaYY-xxxBcc Where "aa" can be 9, 10 or 12; "YY" is M, or P; and "B" can be blank, L or S; and "cc" can be blank, H, H-BF, H-HC, HC-BF or H-HC-BF
BYD	BYD modules with 35 mm frames BYDxxxAY-ZZ Where "A" can be M6, P6, MH or PH; "Y" can be C or K; and "ZZ" can be 30 or 36
Canadian Solar	Canadian Solar modules with 30, 35 and 40 mm frames CSbY-xxxZ Where "b" can be 1, 3, 6 or 6.1; "Y" can be H, K, L, N, P, R, U, V, W, X, Y, or -54TM; and "Z" can be H, M, P, MS, PX, M-SD, P-AG, P-SD, MB-AG, PB-AG, MS-AG, MS-HL, or MS-SD
CertainTeed	CertainTeed modules with 30, 35 and 40 mm frames CTBBxxxYZZ-AA Where "BB" can be blank or M10; "Y" can be M, P, or HC; "ZZ" can be 00, 01, 10, or 11; and "AA" can be 01, 02, 03, 04, 06, 08 or 09
Crossroads Solar	Crossroads Solar modules with 40 mm frames Crossroads Solar xxx
CSUN	Csun modules with 35 and 40 mm frames YYxxx-zzAbb Where "YY" is CSUN or SST; "zz" is blank, 60, or 72; and "A" is blank, P or M or MM; "bb" is blank, BB, 5BB, BW, or ROOF
Dehui	Dehui modules with 35 and 40 mm frames DH-MYYYY-xxx Where "YYYY" can be 760, 772, 860, 872; and "Z" can be B or W
Ecosolargy	Ecosolargy modules with 35, 40, and 50 mm frames ECOxxxYzzA-bbD Where "Y" can be A, H, S, or T; "zz" can be 125 or 156; "A" can be M or P; "bb" can be 60 or 72; and "D" can be blank or B



MANUFACTURER	LIST OF UL 2703 APPROVED MODULES
ET Solar	ET Solar modules with 35, 40, and 50 mm frames ET-YZZZxxxAA Where "Y" can be P, L, or M; "ZZZ" can be 660, 660BH, 672, 672BH, 754BH or 766BH; and "AA" can be TB, TW, WB, WW, BB, WBG, WWG, WBAC, WBCO, WWCO, WWBCO or BBAC
Flex	Flex modules with 35, 40, and 50 mm frames FXS-xxxYY-ZZ; Where "YY" can be BB or BC; and "ZZ" can be MAA1B, MAA1W, MAB1W, SAA1B, SAA1W, SAC1B, SAC1W, SAD1W, SBA1B, SBA1W, SBC1B, or SBC1W
Freedom Forever	Freedom Forever modules with 35 mm frames FF-MPa-BBB-xxx Where "a" can be blank or 1
Freevolt	Freevolt modules with 35 mm frames ECP-PVGRAF-144HC-xxx
GCL	GCL modules with 35 mm and 40 mm frames GCL-ab/YY xxx Where "a" can be M or P; "b" can be 3 or 6; and "YY" can be 60, 72, 72H, or 72DH
GigaWatt Solar	Gigawatt modules with 40 mm frames GWxxxYY Where "YY" can be either PB or MB
Goldi	Goldi modules with 35 mm frames GS10-B108-TF-xxx
Grape Solar	Grape Solar modules with 35 mm frames GS-M120-xxx-FAB1
GreenWatts Solar	GreenWatts modules with 30 and 35mm frames HSYY-A-xxx-ZZ Where "YY" can be 54, 60 or 66; "A" can be blank or F; and "ZZ" can be MN or BOB
Hansol	Hansol modules with 35 and 40 mm frames HSxxxYY-zz Where "YY" can be PB, PD, PE, TB, TD, UB, UD, or UE; and "zz" can be AH2, AN1, AN3, AN4, HH2, HV1, or JH2
Hanwha Solar	Hanwha Solar modules with 40, 45, and 50 mm frames HSLaaP6-YY-1-xxxZ Where "aa" can be either 60 or 72; "YY" can be PA or PB; and "Z" can be blank or B



MANUFACTURER	LIST OF UL 2703 APPROVED MODULES
Hanwha Q CELLS	Hanwha Q CELLS Modules with 30, 32, 35, 40, and 42 mm frames aaYY-ZZ-xxx where “aa” can be Q. or B.; “YY” can be PLUS, PRO, PEAK, LINE PRO, LINE PLUS, PLUS DUO, PEAK DUO or Tron; and “ZZ” can be G3, G3.1, G4, G4.1, L-G2, L-G2.3, L-G3, L-G3.1, L-G3y, L-G4, L-G4.2, L-G4y, LG4.2/TAA, BFR-G3, BLK-G3, BFR-G3.1, BLK-G3.1, BFR-G4, BFR-G4.1, BFR G4.3, BLK-G4.1, G4/SC, G4.1/SC, G4.1/TAA, G4.1/MAX, BFR G4.1/TAA, BFR G4.1/MAX, BLK G4.1/TAA, BLK G4.1/SC, EC-G4.4, G5, G5/SC, G5/TS, BLK-G5, BLK-G5/SC, BLK-G5/TS, L-G5, L-G5.1, L-G5.2, L-G5.2/H, L-G5.3, G6, G6/SC, G6/TS, G6+, BLK-G6, L-G6, L-G6.1, L-G6.2, L-G6.3, G7, BLK-G6+, BLK-G6+/AC, BLK-G6+/HL, BLK-G6+/SC, BLK-G6/TS, G6+/TS, BLK-G6+/TS, BLK-G7, G7.2, G8, BLK-G8, G8+, BLK-G8+ L-G7, L-G7.1, L-G7.2, L-G7.3, L-G8, L-G8.1, L-G8.2, L-G8.3, L-G8.3/BFF, M-G2+, BLK M-G2+, ML-G9, BLK ML-G9, ML-G9+, BLK ML-G9+, BLK-G10, BLK-G10+, BLK-G10+/AC, ML-G10, BLK ML-G10, ML-G10+, BLK ML-G10+, BLK-G10+/HL, ML-G10.a, BLK ML-G10.a, ML-G10.a+, BLK ML-G10.a+, BLK ML-G10 +/t, BLK ML-G10+/TS, XL-G9, XL-G9.2, XL-G9.3, XL-G10.2, XL-G10.3, XL-G10.c or XL-G10.d
Heliene	Heliene modules with 35 and 40 mm frames YYZZxxxxA Where “YY” can be 36, 60, 72, 96, 108, 120, 132 or 144; “ZZ” can be HC, M, P, or MBLK; and “A” can be blank, HomePV, Bifacial, M10-SL, M10 TPC SL, M10-SL-BLK or M10 SL-Bifacial
HT-SAAE	HT-SAAE modules with 35 and 40 mm frames HTyy-aaaZ-xxx Where “yy” can be 60, 66 or 72; “aaa” can be 18, 156 or 166; “Z” can be M, P, M-C, P-C, M(S), M(VS), M(V), P(V), M(V)-C, P(V)-C, or X
Hyperion Solar (Runergy)	Hyperion modules with 30 and 35 mm frames HY-DH108Y8-xxxB Where “Y” can be N or P; and “B” can be blank or B
Hyundai	Hyundai modules with 32, 33, 35, 40 and 50 mm frames HiY-SxxxZZ Where “Y” can be A, D or S; “S” can be M or S; and “ZZ” can be HG, HI, KI, MI, MF, MG, PI, RI, RG, RG(BF), RG(BK), SG, TI, TG, YH(BK) or XG(BK)
Itek	Itek Modules with 40 and 50 mm frames IT-xxx-YY Where “YY” can be blank, HE, or SE, or SE72



MANUFACTURER	LIST OF UL 2703 APPROVED MODULES
JA Solar	JA Solar modules with 30, 35, 40 and 45 mm frames JAyyzz-bbww-xxx/aa Where “yy” can be M, P, M6 or P6; “zz” can be blank, (K), (L), (R), (V), (BK), (FA), (TG), (FA)(R), (L)(BK), (L)(TG), (R)(BK), (R)(TG), (V)(BK), (BK)(TG), or (L)(BK)(TG); “bb” can be 48, 54, 60, 66, 72 or 78; “ww” can be D09, S01, S02, S03, S06, S09, S10, S12, S17, S20, S30 or S31; and “aa” can be BP, MR, SI, SC, PR, 3BB, 4BB, 4BB/RE, 5BB
Jinko	Jinko modules with 30, 35 and 40 mm frames JKMYxxxZZ-aa Where “Y” can either be blank or S; “ZZ” can be M, N, P, or PP; and “aa” can be blank, 54HL4-B, 60, 60B, 60H, 60L, 60BL, 60HL, 60HB, 60HBL, 6HBL-EP, 60-J4, 60B-J4, 60B-EP, 60(Plus), 60-V, 60-MX, 6RL3, 6RL3-B, 6TL3-B, 7RL3-V, 7RL3-TV, 72, 72B, 72-J4, 72B-J4, 72(Plus), 72-V, 72H-V, 72L-V, 72HL-V, 72HBL-V, 72-MX, 72H-BDVP, 72HL-TV, or 72HL-V-MX3
KB Solar	KB Solar modules with 35 mm frames KBS-xxx-Mono-YY Where “YY” can be blank or BF
Kyocera	Kyocera Modules with 46 mm frames KYxxxZZ-AA Where “Y” can be D or U; “ZZ” can be blank, GX, or SX; and “AA” can be LPU, LFU, UPU, LPS, LPB, LFB, LFBS, LFB2, LPB2, 3AC, 3BC, 3FC, 4AC, 4BC, 4FC, 4UC, 5AC, 5BC, 5FC, 5UC, 6BC, 6FC, 8BC, 6MCA, or 6MPA
LA Solar	LA Solar modules with 35 mm frames LSxxxYY Where “YY” can be BL, BLA, HC or ST
LG	LG modules with 35, 40, and 46 mm frames LGxxxYaZ-bb Where “Y” can be A, E, M, N, Q, S; “a” can be A, 1, 2 or 3; “Z” can be C, K, T, or W; and “bb” can be A3, A5, A6, B3, B6, E6, E6.AW5, G3, G4, J5, K4, L5, N5, V5, V6
Longi	Longi modules with 30, 35 and 40 mm frames LRa-YYZZ-xxxM Where “a” can be 4, 5 or 6; “YY” can be blank, 54, 60, 66 or 72; and “ZZ” can be blank, BK, BP, HV, PB, PE, PH, HBD, HIB, HIH, HPB, HPH, HIBD, HABB or HABD
Maxeon	Maxeon modules with 35, 40 and 46 mm frames SPR-AAAY-xxx-zzz Where “AAA” can be MAX or X; “Y” can be 3, 5, 6, 21 or 22; and “zzz” can be R, BLK, BLK-R, or COM



MANUFACTURER	LIST OF UL 2703 APPROVED MODULES
Meyer Burger	Meyer Burger Modules with 35 mm frames Meyer Burger Black, White or Glass
Mission Solar (mSolar)	Mission Solar modules with 33, 35 and 40 mm frames YYYbb-xxxZZaa Where "YYY" can be MSE, TXI or TXS; "bb" can be blank, 6, 10 or 60A; "ZZ" can be blank, HT, MM, SE, SO, SQ, SR, SX, TS, 108, 120 or 144; and "aa" can be blank, 0B, 2B, BB, BW, 1J, 4J, 4S, 5K, 5R, 5T, 60, 6J, 6S, 6W, 6Z, 8K, 8T, 9R, 9S or 9Z
Mitsubishi	Mitsubishi modules with 46 mm frames PV-MYYxxxZZ Where "YY" can be LE or JE; and "ZZ" can be either HD, HD2, or FB
Mitrex	Mitrex modules with 30 and 40 mm frames Mxxx-XYZ Where "X" can be A, B, I or L; "Y" can be 1 or 3; and "Z" can be F or H
Motech	IM and XS series modules with 40, 45, and 50 mm frames
Next Energy Alliance	Next Energy Alliance modules with 35 and 40 mm frames yyNEA-xxxZZ where "yy" can be blank or US; "ZZ" can be M, MB or M-60
NE Solar	NE Solar modules with 30, 35 and 40 mm frames NESExxx-zzMHX-yy Where "zz" can be 54, 60 or 72; "X" can be blank or B; and "yy" can be M6 or M10
Neo Solar Power	Neo Solar Power modules with 35 mm frames D6YxxxZZaa Where "Y" can be M or P; "ZZ" can be B3A, B4A, E3A, E4A, H3A, H4A; and "aa" can be blank, (TF), ME or ME (TF)
Panasonic (HIT)	Panasonic modules with 35 and 40 mm frames VBHNxxxYYzza Where "YY" can be either KA, RA, SA or ZA; "zz" can be either 01, 02, 03, 04, 06, 06B, 11, 11B, 15, 15B, 16, 16B, 17, or 18; and "A" can be blank E, G or N
Panasonic (EverVolt)	Panasonic modules with 30 mm frames EVPVxxxA Where "A" can be blank or H, K, HK or PK



MANUFACTURER	LIST OF UL 2703 APPROVED MODULES
Peimar	Peimar modules with 40 mm frames SbxxxYzz Where “b” can be G, M or P; “Y” can be M or P; and “zz” can be blank, (BF), or (FB)
Philadelphia Solar	Philadelphia modules with 30, 35 and 40 mm frames PS-YzzAA-xxx Where “Y” can be M or P; “zz” can be 60, 72, 108 or 144; and “AA” can be blank, (BF), (HC) or (HCBF)
Phono Solar	Phono Solar modules with 30, 35 and 40 mm frames PSxxxY-ZZ/A Where “Y” can be M, M1, MH, M1H, M4, M4H, M5GF, M5GFH, M6, M6H, M8GF, M8GFH or P; “ZZ” can be 18, 20 or 24; and “A” can be F, T, TH, U, UH, UHB, VH or VHB
Prism Solar	Prism Solar modules with 35 mm frames PST-xxxW-M72Y Where “Y” can be H, HB or HBI
Recom	Recom modules with 35 and 40 mm frames RCM-xxx-6yy Where “yy” can be MA, MB, ME or MF
REC Solar	REC modules with 30, 38 and 45 mm frames RECxxxYYZZ Where “YY” can be AA, M, NP, NP2, NP3, PE, PE72, TP, TP2, TP2M, TP2SM, TP2S, TP3M or TP4; and “ZZ” can be blank, Black, BLK, BLK2, SLV, 72, Pure, Pure-R, Pure-RX or Pure 2
Renesola	ReneSola modules with 35, 40 and 50 mm frames AAxxxY-ZZ Where “AA” can be SPM(SLP) or JC; “Y” can be blank, F, M or S; and “ZZ” can be blank, Ab, Ab-b, Abh, Abh-b, Abv, Abv-b, Bb, Bb-b, Bbh, Bbh-b, Bbv, Bbv-b, Db, Db-b, or 24/Bb
Renogy	Renogy Modules with 35 and 40 mm frames RZZ-xxxY-AAA Where “ZZ” can be NG or SP; “Y” can be D or P; and “AAA” can be blank, 144, BB-108, BB-120 or BK-120
Risen	Risen Modules with 35 and 40 mm frames RSMyy-6-xxxZZ Where “yy” can be 60, 72, 120, 132 or 144; and “ZZ” can be M or P

MANUFACTURER	LIST OF UL 2703 APPROVED MODULES
S-Energy	S-Energy modules with 35 and 40 mm frames SABB-CCYYY-xxxZ Where "A" can be C, L or N; "BB" can be blank, 20, 40 or 45; "CC" can be blank, 60 or 72; "YYY" can be blank, MAE, MAI, MBE, MBI, MCE or MCI; and "Z" can be V, M-10, P-10 or P-15
SEG Solar	SEG Solar modules with 35 and 40 mm frames SEG-aYY-xxx-ZZ Where "a" can be blank, 6 or B; "YY" can be blank, MA, MB, PA, or PB; and "ZZ" can be blank, BB, BG, BW, HV, WB, WW, BMB, BMA-HV, BMA-TB, BMB-HV, BMB-TB, BMD-HV or BMD-TB
Seraphim Energy Group	Seraphim modules with 35 and 40 mm frames SEG-aYY-xxxZZ Where "a" can be blank, 6 or B; "YY" can be blank, MA, MB, PA, or PB; and "ZZ" can be blank, BB, BG, BW, HV, WB, WW, BMB, BMA-HV, BMB-HV
Seraphim USA	Seraphim modules with 35, 40 and 50 mm frames SRP-xxx-YYY-ZZ Where "xxx" is the module power rating; and "YYY" can be 6MA, 6MB, 6PA, 6PB, BMD, 6QA-XX-XX, and 6QB-XX-XX; ZZ is blank, BB or HV
Sharp	Sharp modules with 35 and 40 mm frames NUYYxxx Where "YY" can be SA or SC
Shinsung E&G	Shinsung Modules with 35 mm frames SSVxxx-144MH
Silfab	Silfab Modules with 35 and 38 mm frames SYY-Z-xxxAb Where "YY" can be IL, SA, LA, SG or LG; "Z" can be blank, M, P, or X; "A" can be blank, B, H, M, N or Q; and "b" can be A, C, C+, D, G, K, L, M, N, T, U or X
Solar4America	Solar4America modules with 30, 35 and 40 mm frames S4Axxx-ZZyyAA Where "ZZ" can be 60, 72 or 108; "yy" can be MH5 or MH10; and "AA" can be blank, BB, BW or SW
Solarever	Solarever modules with 35 mm frames SE-zzz*yy-xxxM-aaa Where "zzz" can be 166 or 182; "yy" can be 83 or 91; and "aaa" can be 108 or 144



MANUFACTURER	LIST OF UL 2703 APPROVED MODULES
Solaria	Solaria modules with 35 and 40 mm frames PowerA-xxxY-ZZ Where "A" can be X or XT, "Y" can be R or C; and "ZZ" can be blank, AC, BD, BX, BY, PD, PL, PM, PM-AC, PX, PZ, WX or WZ
Solarcity (Tesla)	Solarcity modules with 40 mm frames SCxxxYY Where "YY" can be blank, B1 or B2
SolarTech	SolarTech modules with 40 and 42 mm frames AAA-xxxYY Where "AAA" can be PERCB-B, PERCB-W, HJT B-B, HJT B-W or STU; "YY" can be blank, PERC or HJT
SolarWorld AG	SolarWorld Sunmodule Plus, Protect, Bisun, XL, Bisun XL, may be followed by mono, poly, duo, black, bk, or clear; modules with 31, 33 or 46 mm frames SW-xxx
SolarWorld Americas	SolarWorld Sunmodule Plus, Protect, Bisun, XL, Bisun XL, may be followed by mono, poly, duo, black, bk, or clear; modules with 33 mm frames SWA-xxx
Sonali	Sonali Modules with 35 and 40 mm frames SS-M-xxx Where "M" can be blank or M
Star Solar	Star Solar modules with 35 mm frames Star-xxxYYY-ZZZ Where "YYY" can be M60H or M60HB; and "ZZZ" can be blank or M10
Stion	Stion Thin film modules with 35 mm frames STO-xxx or STO-xxxA
SunEdison	SunEdison Modules with 35, 40 & 50 mm frames SE-YxxxZABCDE Where "Y" can be B, F, H, P, R, or Z; "Z" can be 0 or 4; "A" can be B, C, D, E, H, I, J, K, L, M, or N; "B" can be B or W; "C" can be A or C; "D" can be 3, 7, 8, or 9; and "E" can be 0, 1 or 2
Suniva	Suniva modules with 35, 38, 40, 46, and 50 mm frames OPTxxx-AA-B-YYY-Z MVXxxx-AA-B-YYY-Z Where "AA" is either 60 or 72; "B" is either 4 or 5; "YYY" is either 100,101,700,1B0, or 1B1; and "Z" is blank or B



MANUFACTURER	LIST OF UL 2703 APPROVED MODULES
Sunmac Solar	Sunmac modules with 30 and 35 mm frames SMxxxMaaaZZ-BB Where “aaa” can be 660 or 754; and “ZZ” can be NH or SH
Sunpower	Sunpower standard (G3 or G4) or InvisiMount (G5) 35, 40 and 46 mm frames SPR-Zb-xxx-YY Where “Z” can be A, E, P, M or X; “b” can be blank, 17, 18, 19, 20, 21, or 22; and “YY” can be blank, BLK, COM, C-AC, D-AC, E-AC, BLK-E-AC, G-AC, BLK-G-AC, H-AC, BLK-H-AC, BLK-C-AC, or BLK-D-AC
Sunspark	Sunspark modules with 40 mm frames SYY-xxxZ-A Where “YY” can be MX or ST; and “Z” can be M, MB, M3, M3B, P or W; and “A” can be 60 or 72
Suntech	Suntech Modules with 35, 40 and 50 mm frames STPxxxz-aa Where “y” is blank or S; and “zz” can be 20, 24, A60, A72U, B60 or B72; and “aa” can be Vd, Vem, Vfw, Vfh, Vnh, Wdb, Wde, Wd, Wfhh or Wnhb
Talesun	Talesun modules with 30, 35 and 40 mm frames TP6yZZaaxxx-b Where “P” can be D or P; “y” can be blank, F, H, I or L; “ZZ” can be 60 or 72; “aa” can be M, M(H), or P; and “b” can be blank, B, T, or (H)
Tesla	Tesla modules with 40 mm frames TxxxY Where “Y” can be H or S
Thornova	Thornova Modules with 30 and 35 mm frames TS-YYZZ(XXX)-X Where “YY” can be BB or BG; “ZZ” can be 54 or 60; and “X” can be blank or X
Trina	Trina Modules with 30, 35, 40 and 46 mm frames TSM-xxxYYZZ Where “YY” can be DD05, DD06, DD14, DE09, DE14, DE06X, DE15, DE15V, DEG15, PA05, PC05, PD05, PD06, PA14, PC14, PD14, PE14, PE15 or NE09RC ; and “ZZ” can be blank, (II), .05, .05(II), .08, .10, .18, .08D, .18D, 0.82, .002, .00S, 05S, 08S, A, A.05, A.08, A.10, A.18, A(II), A.05(II), A.08(II), A.082(II), A.10(II), A.18(II), C.05, C.07, C.05(II), C.07(II), H, H(II), H.05(II), H.08(II), HC.20(II), HC.20(II), M, M(II), M.05(II), MC.20(II)



MANUFACTURER	LIST OF UL 2703 APPROVED MODULES
Universal	Universal Solar Modules with 35 mm frames UNI-xxx-yyyZZZ-aa Where “yyy” can be 108, 120 or 144; “ZZZ” can be M, MH or BMH; and “aa” can be blank, BB or DG
URE	URE modules with 35 mm frames DyZxxxxaa Where “D” can be D or F, “y” can be A, B, 6 or 7; “Z” can be K, or M; and “aa” can be C8G, H3A, H4A, H8A, E7G-BB, E8G, E8G-BB, MFG, MFG-BB or M7G-BB
Vikram	Vikram solar modules with 35 and 40 mm frames XVSyy.ZZ.AAA.bb Where “X” can be blank, Paradea, Prexos or Somera; “yy” can be M, P, MBB, MDH, MDHT, MH, MS, MHBB, or PBB; “ZZ” can be 54, 60 or 72; “AAA” is the module power rating; and “bb” can be 03, 04 or 05
VSUN	VSUN modules with 30, 35 and 40 mm frames VSUNxxx-YYz-aa Where “YY” can be 60, 72, 108, 120, 132 or 144; “z” can be M, P, MH, PH, or BMH; and “aa” can be blank, BB or BW
Waaree	Waaree modules with 35 and 40 mm frames WSyy-xxx where “yy” can be blank or M, MDI or MDIB
Winaico	Winaico modules with 35 and 40 mm frames Wsy-xxxZa Where “y” can be either P or T; “Z” can be either M, P, or MX; and “a” can be blank or 6
Yingli	Yingli modules with 30, 35 and 40 mm frames YLxxxZ-yy Where “Z” can be D or P; “yy” can be 29b, 30b, 34d, 35b, 36b, 37e 1/2, 37e 1500V 1/2, 40d, 49e 1/2 or 49e 1500V 1/2
Yotta	Yotta modules with 30 mm frames YSM-Bxxx-06-72-1
Zeus	Zeus Solar Modules with 40 mm frames ZxxxM-HB
ZN Shine	ZN Shine modules with 30 and 35 mm frames ZXMY-AAA-xxx/M Where “Y” can be 6 or 7, “AAA” can be 72, NH120, NH144, NHDB144 or SH108