



# 44-R™

## THE DIRECT-TO-DECK SOLUTION FOR A VARIETY OF ROOF TYPES

The base plate of the 44-R utilizes 8 fasteners, allowing the system to be installed directly to the roof deck without engaging a rafter. The 44-R System can be used on low slope rolled asphalt, comp shingle, and SIPS (Structural Insulated Panel) roofs with pitches from 1/4:12 - 21:12. 44-R is a customizable solution for new or existing roofs, and has been tested extensively for pullout and shear.

### FEATURES & BENEFITS

- Patented watertight technology
- Specialized solution works with any proprietary hardware
- Compatible with a variety of EcoFasten brackets
- Wide footprint for optimal load dispersal
- Direct-to-deck attachment

## CUSTOMIZABLE APPLICATION METHODS TO MEET YOUR NEEDS



Low slope, comp  
shingle, rolled  
asphalt, and SIPS



Rail-Based  
Rail-Less



Structural-Attach  
Direct-Attach




# 44-R™

THE DIRECT-TO-DECK  
SOLUTION FOR A  
VARIETY OF ROOF TYPES

## CONFIGURATION OPTIONS

### 1. COMBINE BASE & FLASHING:

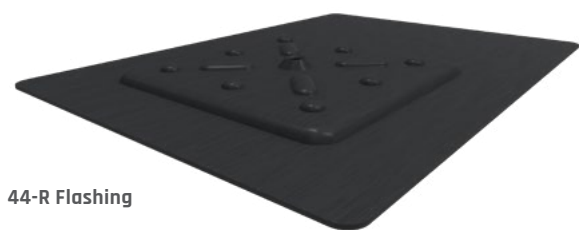

44-R Flashing



44-R Base



x8

### 2. CHOOSE YOUR BRACKET:



ClickFit Universal L-Foot  
3", Mill Finish



Open Slot L-Foot  
3", Black Anodized



Rockit Comp Slide

[VIEW THE COMPLETE PARTS LIST](#)